



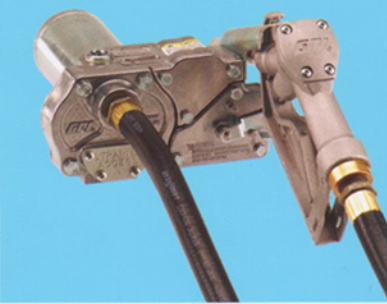

PUMP SPECS

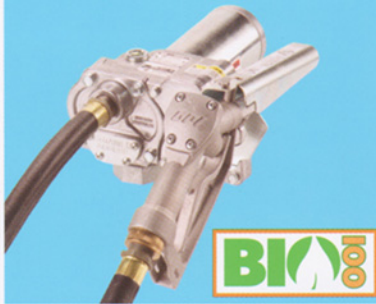

MODEL

M-150S-B100-MU or -AU

M-180S-ML or -AU

M-240S-MU

PART NUMBER

110000-126 w/manual nozzle
110000-127 w/auto nozzle

110300-1 w/manual nozzle
110300-2 w/auto nozzle
110300-3 w/manual nozzle &
CE Approval
110300-4 w/auto nozzle &
CE Approval

110000-70 w/manual nozzle
110000-91 w/manual nozzle &
CE Approval

VOLTAGE & TYPE

12-Volt DC - Gear
Explosion proof motor.

12-Volt DC - Gear
Explosion proof motor.

12-Volt DC - Gear
Explosion proof motor.

FLOWRATE

Up to 15 GPM (57 LPM)

Up to 18 GPM (69 LPM)

Up to 15 GPM (57 LPM)

DUTY CYCLE

30 min. On / 30 min. Off

30 min. On / 30 min. Off

30 min. On / 30 min. Off

POWER CORD

18 ft. (5.5m) x 12/2 AWG

18 ft. (5.5m) x 12/2 AWG

18 ft. (5.5m) x 12/2 AWG

NOZZLE

Choice of Manual or
Automatic Shutoff

Choice of Manual or
Automatic Shutoff

Manual Shutoff

SUCTION PIPE

Adjustable to 40 in.

Adjustable to 40 in.

Adjustable to 40 in.

HOSE

12 ft. (3.7m) x 3/4 in.

12 ft. (3.7m) x 1 in.

12 ft. (3.7m) x 3/4 in.

MOTOR PROTECTION

Circuit breaker for long life.

Circuit breaker for long life.

Circuit breaker for long life.

UNIQUE FEATURE

Convenient Spin Collar for
easy installation.

Improved flowrate and
convenient Spin Collar.

Convenient Spin Collar for
easy installation.

USE WITH

Gasoline (alcohol blends E15),
diesel fuel (biodiesel blends
B100) and Kerosene.

Gasoline (alcohol blends E15), diesel fuel
(biodiesel blends B20) and kerosene.

APPROVALS

U.L. Listed Motor. CSA Certified
Flammable Liquid Dispenser.

U.L. Listed Motor. CSA Certified
Flammable Liquid Dispenser.

U.L. Listed Motor. CSA Certified
Flammable Liquid Dispenser.

WARRANTY

2 Year

2 Year

2 Year