# PUMP SPECS

## WORLD'S HIGHEST FLOW HAND PUMP

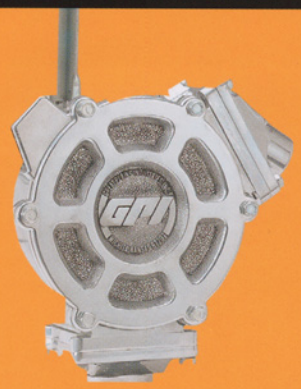

| | | |
|---|---|---|
| MODEL | HP-100-NUL or HP-100-UL | HP-90 |
| PART NUMBER | 114000-5 is non-UL Listed Model<br>114000-10 is UL Listed Model | 131000-1 |
| PUMP TYPE | Piston | Piston |
| FLOWRATE | Up to 50 gallons per 100 strokes. | Up to 25 gallons per 100 strokes. |
| NOZZLE TYPE | 114000-5 is Thermoplastic<br>114000-10 is Metal | Thermoplastic |
| HOSE TYPE | 114000-5 Buna-N® without static wire<br>114000-10 with static wire | Buna-N® without static wire |
| HOSE SIZE | 8 ft. (2.5m) x 3/4 in. | 8 ft. (2.5m) x 3/4 in. |
| TANK FITTING | 2 in. NPT | 2 in. NPT |
| SUCTION PIPE | Adjustable to 40 in. | Two-piece, Trim-to-fit |
| UNIQUE FEATURE | Premium pump moves fluid on both push and pull strokes. Lockable. | Dual action economy pump. |
| USE WITH | Diesel fuel (biodeisel blends B20), gasoline (alcohol blends E15), hydraulic fluid, kerosene and oil (up to 30 wt.). | Diesel fuel (biodeisel blends B20), gasoline (alcohol blends E15), hydraulic fluid, kerosene and oil (up to 10 wt.). |
| APPROVALS | UL Listed for HP-100-UL Model | None |
| WARRANTY | 2 Year | 2 Year |