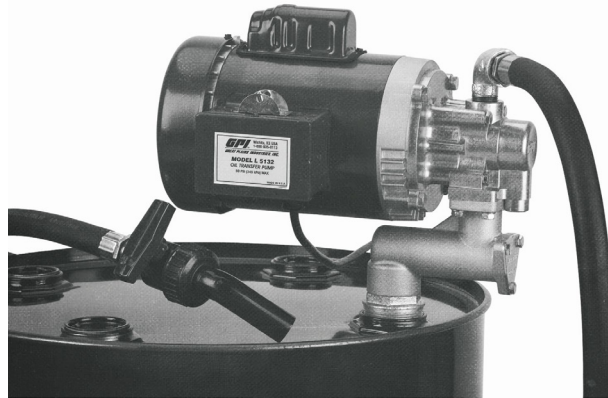






GPI ELECTRIC LUBE OIL TRANSFER PUMPS

GPI oil pumps are specifically designed for use with high viscosity fluids like oil. These oil pumps are built with rugged motors for long-life and limited maintenance. These weatherproof pumps will give you years of service when used correctly with the right fluids. Consider the viscosity of the fluid being pumped and temperature range when choosing the best oil pump for your particular application.







| | MODEL # | PREFERRED |
|--|---------------------|------------------|
| <p style="text-align: center;">L5116</p> <ul style="list-style-type: none"> * 115 volt AC pump includes a 1/2 hp motor. * Pumps 16 QPM (4 GPM) * Unit includes: Pump, 2 piece suction pipe, 8 ft hose, 90 degree street elbow, 3/4 inch 3 prong cord and ball valve nozzle. * Thermally protected motor * Use with antifreeze, hydraulic fluid, non-flammable oil based solvents and motor, gear, or waste oil. * 1 Year Warranty | 60-142100-01 | \$ 660.00 |
| <p style="text-align: center;">L5132</p> <ul style="list-style-type: none"> * 115 volt AC pump includes a 1 hp motor. * Pumps 32 QPM (8 GPM) * Unit includes: Pump, 2 piece suction pipe, 8 ft hose, 90 degree street elbow, 3/4 inch 3 prong cord and ball valve nozzle. * Thermally protected motor * Use with antifreeze, hydraulic fluid, non-flammable oil based solvents and motor, gear, or waste oil. * 1 Year Warranty | 60-142100-02 | \$ 704.22 |

NATIONAL SPENCER AIR OPERATED DIAPHRAGM PUMPS

| 3/8" PUMP (not suitable for flammable liquid) | MODEL # | PREFERRED |
|--|---------------------------------------|-------------------------|
|  <p># 1025</p> <p style="text-align: center;">National Spencer</p> <ul style="list-style-type: none"> • Maximum Flow 6 GPM • Inlet/Outlet 3/8" NPT • Body Construction Polypropylene • Diaphragm Santoprene • Seats Santoprene • UL Listed No • Maximum Inlet Air Pressure 100 PSI | <p>6 GPM</p> <p>15-ZE1025</p> | <p>\$ 301.26</p> |
| 1/2" PUMPS (not suitable for flammable liquid) | | |
|  <p># 1035</p> <p style="text-align: center;">National Spencer</p> <ul style="list-style-type: none"> • Maximum Flow 6 GPM • Inlet/Outlet 1/2" NPT • Body Construction Polypropylene • Diaphragm Buna N • Balls Acetal • Seats Polypropylene • UL Listed No • Air Consumption 16CFM@100PSI | <p>14 GPM</p> <p>15-ZE1035</p> | <p>\$ 583.82</p> |
|  <p># 1037</p> <p style="text-align: center;">National Spencer</p> <ul style="list-style-type: none"> • Maximum Flow 14 GPM • Inlet/Outlet 1/2" NPT • Body Construction Polypropylene • Diaphragm Buna N • Check Valve Buna N • UL Listed No • Will Pass Solids up to 1/16" Diameter | <p>14 GPM</p> <p>15-ZE1037</p> | <p>\$ 725.28</p> |
| 3/4" PUMPS (not suitable for flammable liquid) | | |
|  <p># 1038</p> <p style="text-align: center;">National Spencer</p> <ul style="list-style-type: none"> • Maximum Flow 14 GPM • Inlet/Outlet 3/4" NPT • Body Construction Aluminum/Poly • Diaphragm Buna N • Balls Acetal • Seats Aluminum • UL Listed No • Air Consumption 16 CFM@100PSI | <p>14 GPM</p> <p>15-ZE1038</p> | <p>\$ 670.76</p> |

NATIONAL SPENCER AIR OPERATED DIAPHRAGM PUMPS

| 1" PUMPS (not suitable for flammable liquid) | MODEL # | PREFERRED |
|---|--------------------------------------|---------------------------|
|  <p>National Spencer #1040 Maximum Flow 37 GPM, Inlet/Outlet 1" NPT, Body Construction is Aluminum/Poly, Diaphragm is Buna N, Balls are Acetal, Seats are Aluminum, Not UL Listed, Air Consumption is 40CFM@80 PSI.</p> | <p>37 GPM 15-ZE1040</p> | <p>\$ 901.36</p> |
| 1" UL PUMPS | | |
|  <p>National Spencer #1040UL Maximum Flow 37 GPM, Inlet/Outlet 1" NPT, Body Construction is Aluminum/Poly, Diaphragm is Buna N, Balls are teflon, Seats are Aluminum, UL Listed, Air Consumption is 40CFM@80 PSI.</p> | <p>37 GPM 15-ZE1040UL</p> | <p>\$ 1,178.97</p> |
| 2" PUMPS (not suitable for flammable liquid) | | |
|  <p>National Spencer #1043 Maximum Flow-155 GPM, Inlet/Outlet-2" NPT, Body Construction-Aluminum, Diaphragm-Buna N, Balls-Buna N, Seats-Buna N, UL Listed-No, Air Consumption-100CFM@100PSI</p> | <p>155 GPM 15-ZE1043</p> | <p>\$ 1,755.15</p> |
| 3" PUMPS (not suitable for flammable liquid) | | |
|  <p>National Spencer #1044 Maximum Flow-260 GPM, Inlet/Outlet-3" NPT, Body Construction-Aluminum, Diaphragm-Buna N, Balls-Buna N, Seats-Buna N, UL Listed-No, Air Consumption-140CFM@95 PSI</p> | <p>260 GPM 15-ZE1044</p> | <p>\$ 2,462.46</p> |

NATIONAL SPENCER AIR OPERATED OIL PUMPS STUB STYLE

1712 3:1 AIR OPERATED OIL PUMPS



- Maximum delivery rate 5 GPM
- Pressure relief valve
- 1/4" NPT air inlet
- 3/4" NPT fluid inlet/outlet
- 1/2" x 48" oil hose
- 1/4" x 48" air hose
- Pump length 19 11/16"
- 2" bung adapter
- Foot valve
- Air line filter w/ nighttime drain, regulator, gauge, ball valve and quick disconnects
- Maximum fluid pressure 435 PSI
- Maximum air pressure 145 PSI
- Oil Outlet swivel

MODEL

PREFERRED

15-ZE1712
w/o Suction Tube

\$ 585.49

15-ZE1713
Fits 16 Gal drum
PVC 3/4"x17"

\$ 695.42

15-ZE1714
Fits 55 Gal drum
PVC 3/4"x22"

\$ 586.22

15-ZE1716
Fits 275 Gal Tank
PVC 3/4"x28"

\$ 586.22

1730A 5:1 Air Operated Oil Pumps







- Maximum delivery rate 5 GPM
- Pressure relief valve
- 1/4" NPT air inlet
- 3/4" NPT fluid outlet
- 1" NPT fluid inlet
- 1/2" x 48" oil hose
- 1/4" x 48" air hose
- Pump length 19 11/16"
- 2" bung adapter
- Foot valve
- Air line filter w/ automatic drain, regulator, gauge, ball valve and quick disconnects
- Maximum fluid pressure 725 psi
- maximum air pressure 145 psi
- Oil outlet swivel

15-ZE1730A








w/o Suction Tube

\$ 696.51




OIL PUMP KIT PACKAGES

| | MODEL # | PREFERRED |
|---|---|---------------------------|
| <p>National Spencer Universal Tote Mounting Plate</p> <ul style="list-style-type: none"> Fits totes 39" to 41" wide Clamps to side rails of most shaped cages Meter holder that catches oil droplets Steel construction 2" NPT threads for pump 2" filler neck with rubber cap Holes for mounting Zee Line reels  <p>6601</p>  <p>6611, 6612, 6613 Tote Not Included</p> | <p>15-ZE6601 Tote Mounting Plate Only</p> | <p>\$ 322.44</p> |
| | <p>15-ZE6611 3:1 Stub Pump (1712), 32' Reel (1475R) Mechanical Meter (1525)</p> | <p>\$ 1,708.27</p> |
| | <p>15-ZE6612 3:1 Stub Pump (1712), 32' Reel (1475R) Mechanical Meter (1515)</p> | <p>\$ 1,772.66</p> |
| | <p>15-ZE6613 3:1 Stub Pump (1712), 25" hose, Digital Quart Meter (1504)</p> | <p>\$ 1,24.10</p> |
| <p>National Spencer 4 Wheel Trolley</p> <p>4 Wheel trolley for carrying 16 gallon to 55 gallon drums with hose reel tray.</p>  <p>148</p>  <p>6401, 6403 Drum Not Included</p> | <p>15-ZE148 4 Wheel Trolley with Hose Reel Tray</p> | <p>\$ 301.47</p> |
| | <p>15-ZE6401 3:1 Stub Pump (1702R), 32' Reel (1475R), Digital Quart Meter (1504)</p> | <p>\$ 1,692.04</p> |
| | <p>15-ZE6403 3:1 Stub Pump (1714), 32' Reel (1475R), Mechanical Meter (1515)</p> | <p>\$ 1,826.50</p> |



NATIONAL SPENCER METERING VALVES

| | | MODEL # | PREFERRED |
|---|--|-------------------------------|-------------------------------|
|  <p>National Spencer Non-Preset Mechanical Oil Meter</p> <p>Quart meter - U.S. quarts with 1/4-quart graduations. Totalizes in U.S. quarts</p>  | | Rigid Spout | \$ 398.48 |
| | | 15-ZE1508 | Flex Spout |
|  <p>National Spencer Preset Mechanical Oil Meter</p> <p>Quart Meter. Totalizes in U.S. quarts. Automatically shuts off at pre-selected quantity.</p> | | 1 to 16 quarts Rigid Spout | \$ 596.23 |
| | | 15-ZE1519 | 1 to 60 quarts Rigid Spout |
|  <p>National Spencer Non-Preset Electronic Oil Meter</p> <p>Digital meter for dispensing in pints, quarts, liters, or gallons. Totalizes in gallons or liters. Cast aluminum housing. Easily replaceable 3 Volt lithium battery.</p> | | Rigid Spout | \$ 404.29 |
|  <p>National Spencer</p> <p>Dispenses in quarts only 3 1/2" easy to read 5 digit display with .01 increments 1/2" NPT threads on inlet and outlet Extension hose (1315A) Automatic nozzle with non-drip tip (26A) Battery type 3VCR1/2AA (62576-001) Rubber shroud protects the display</p> | | 15-ZE1504 | \$ 294.06 |
|  <p>National Spencer</p> <p>Odometer style mechanical meter Dispenses in quarts only Resettable totalizer 4 digits 1/2" NPT threads on inlet and outlet Extension hose (1315A) Automatic nozzle with non-drip tip (26A) Battery type 3VCR1/2AA (62576-001) Rubber shroud protects the display</p> | | 15-ZE1525G | \$ 338.94 |
|  <p>National Spencer Preset Metering Valve</p> <p>Factory programmed and calibrated Accurate to second decimal 8 GPM maximum flow rate 5 digit display with .01 increment 1000 psi maximum working pressure Lightweight and rugged with comfort grip 1/2" NPT threads on inlet and outlet 1/2" pipe extension with automatic non-drip tip 4 AAA batteries</p> | | 15-ZE1522 | \$ 536.71 |

NON METERING VALVES

| | MODEL # | PREFERRED |
|---|--------------------------|------------------------|
|  <p>National Spencer</p> <p>Deluxe Oil Control Handle. Includes 14" length, 1/2" diameter flexible hose with manual non-drip nozzle.</p> <p>1575G</p> | <p>15-ZE1575G</p> | <p>\$ 82.13</p> |
|  <p>National Spencer</p> <p>Deluxe Oil Control Handle. Includes 8" 30° bend, 1/2" diameter rigid extension with manual non-drip nozzle.</p> <p>1580G</p> | <p>15-ZE1580G</p> | <p>\$ 99.62</p> |
|  <p>National Spencer</p> <p>Oil control handle for transferring oils and antifreeze. Includes trigger lock. 1/2" NPT fitting. Outlet diameter 13/16".</p> <p>1572G</p> | <p>15-ZE1572G</p> | <p>\$ 58.88</p> |

AIR FILTERS, REGULATORS, LUBRICATORS

| | | |
|--|--------------------------|-------------------------|
|  <p>National Spencer</p> <p>Mini air regulator with 4 ports (2) 1/4" NPT and (2) 1/8" NPT (with 1 plug). For air pressure ranging from 0 to 200 PSI.</p> <p>1554</p> | <p>15-ZE1554</p> | <p>\$ 31.01</p> |
|  <p>National Spencer</p> <p>Heavy duty air treatment unit will provide moisture-free air with a touch of oil for lubrication. Handles 18 CFM with 100 PSI inlet pressure. Includes filter, gauge, regulator and oiler. 1/4" NPT (F).</p> <p>1573A</p> | <p>15-ZE1573A</p> | <p>\$ 116.73</p> |

NATIONAL SPENCER AIR OPERATED GREASE SYSTEMS

**National Spencer
3574A**



55:1 Grease Pump
Control Handle, 1545 Z Swivel,
18527 Cover & 107016 Follow Plate
Includes Pump, 6' Hose, 1536A
Assembly for 35-50 Lb. Pails.

MODEL #

PREFERRED

15-ZE3574A

\$ 756.18

**Natioanl Spencer
1213A**



55:1 Grease Pump Assembly for
120 Lb. Drums
Includes Pump, Drum Cover, 6'
Hose, 1536A Control Handle, 1545
Z Swivel, Drum Dolly, 1524 Follower
Plate

15-ZE1213A



\$ 832.70

Strick Equipment can put together many different packages for your portable grease systems. Just give us a call and tell us what your needs are. 1-877-737-4690



GREASE CONTROL HANDLES & SWIVELS

| | MODEL # | PREFERRED |
|--|--------------------------|------------------------|
|  <p>National Spencer Model 1536A</p> <p>High pressure grease booster control valve. Can be used as regular control valve by squeezing handle once. If additional pressure is required, squeeze handle again. Will develop pressure up to 10,000 psi. Has 1/8" NPT (F) inlet.</p> | <p>15-ZE1536A</p> | <p>\$ 90.36</p> |
|  <p>National Spencer Model 1545</p> <p>"Z" swivel, 1/4" NPTF x 1/8" NPTM. Use with Model 1536A Control Handle</p> | <p>15-ZE1545</p> | <p>\$ 45.44</p> |
|  <p>National Spencer Model 1534</p> <p>Pressure is determined by the pump used with this handle. Continuous flow. Steel construction. Has 1/4" NPT (F) inlet.</p> | <p>15-ZE1534</p> | <p>\$ 66.04</p> |
|  <p>National Spencer Model 1547</p> <p>"Z" swivel, 1/4" NPTF x 1/4" NPTM. Use with Model 1534 Control Handle</p> | <p>15-ZE1547</p> | <p>\$ 44.77</p> |
|  <p>National Spencer Hydraulic Grease Coupler</p> <p>7,500 PSI Heavy-duty 3 Jaw hydraulic coupler with ball check for air operated equipment.</p> | <p>15-ZE44</p> | <p>\$ 6.79</p> |
|  <p>National Spencer Hydraulic Grease Coupler</p> <p>6,000 PSI Standard 4 Jaw hydraulic coupler with ball check.</p> | <p>15-ZE27</p> | <p>\$ 5.36</p> |



BATTERY OPERATED GREASE GUNS

| | MODEL # | PREFERRED |
|--|-----------------------|------------------|
|  <p>National Spencer Zee-Line 19.2 Volt Cordless Heavy Duty Grease Gun</p> <p>Features Include: 19.2 Volt Ni-Cad rechargeable battery, 8,500 psi, high flow rate of 4.9 oz./min., 14.5 oz. capacity reservoir tube, 1 hour quick charge, two 1500 mAh battery packs, Plastic storage case, Whip hose holster.</p> | 15-ZE912-19 | \$ 205.00 |
| <p>Zee-Line 19 Volt AC Battery Charger</p> <p>For use w/ model 912-19</p> | 15-ZE91202-19 | \$ 29.19 |
| <p>Zee-Line 19 Volt Replacement Battery</p> <p>For use w/ model 912-19</p> | 15-ZE91201-19 | \$ 69.92 |
| <p>National Spencer Zee-Line 19 volt Lithium Grease gun</p>  <p>Features Include: 8,500 psi rated Holds a 14.5 oz. grease cartridge Recommended for grease up to NLGI no. 2 High flow rate quickly delivers the perfect amount of grease for the job Includes a 30 in. whip hose with spring guard, 1/8 in. NPT threads, air bleeder valve, whip hose holster, shoulder strap, Lithium charger, and hard-side storage case.</p> | 15-ZE912-19L | \$ 281.28 |
| <p>Zee-Line 19 volt Battery Charger (Lithium)</p> <p>For use w/ model 912-19L</p> | 15-ZE91202-19L | \$ 42.94 |
| <p>Zee-Line 19 volt Replacement Battery (Lithium)</p> <p>For use w/ model 912-19L</p> | 15-ZE91201-19L | \$ 104.59 |

HAND OPERATED GREASE GUNS

| | MODEL # | PREFERRED |
|---|--------------------------------|-------------------------------------|
|  <p>National Spencer Pistol Style Grease Gun</p> <p>Piston Grip Style Grease Gun Bright zinc plated and spring primed. Filled by 14.5 oz. grease cartridge, filler pump or suction.</p> | 15-ZE610 | \$ 35.64 |
| | 15-ZE610-10 Case 10 | \$ 245.89 (\$ 24.59 ea.) |
|  <p>National Spencer Air Grease Gun w/ Swivel</p> <p>Air operated hand grease gun. Features pistol spring primed. Fill by 14 1/2 oz. cartridge. Inlet pressure 75 to 100 psi.</p> | 15-ZE911 | \$ 67.16 |

REPLACEMENT HOSES

| | | |
|--|---|------------------------|
| <p>National Spencer Replacement Flex Hoses for Hand Grease Guns</p>  <p>Available in 18" lengths. Designed to be used with hand grease guns.</p> | <p>15-ZE18R</p> <p>18"</p> | <p>\$ 9.45</p> |
| <p>National Spencer Replacement Flex Hoses for Air Grease Guns</p>  <p>Available in 18" lengths. Designed to be used with air grease guns.</p> | <p>15-ZE18RR</p> <p>18"</p> | <p>\$ 26.99</p> |

LUBE PAIL PUMPS, BARREL PUMPS & SYPHON PUMPS

| | | MODEL # | PREFERRED |
|---|--|---|---|
|  <p>National Spencer 321 Lube Pail Pump</p> <p>Lube Pump - fits full open head pails 5 through 6 1/2 gallons. Includes pump, pail, cover and 4 feet of clear vinyl hose with curved discharge nozzle.</p> | | 15-ZE321 | \$ 53.41 |
| | | | |
|  <p>120 Lb. Drum Pump</p> <p>Lube Pump fits 120 Lb. full open head drums. Includes pump, drum cover and 5' of clear vinyl hose with curved discharge nozzle.</p> | | 15-ZE336 | \$ 66.99 |
| | | | |
|  <p>Barrel Pump</p> <p>Barrel pump fits 15 through 55 gallon drums with 1" bung opening. Has a zinc die-cast piston with two brass rings, plastic telescoping tube assembly. Buna N seals, plastic handle grip, and curved discharge spout with garden hose threads. Dispenses approximately 1 pint per stroke. Has adjusting nut on bung threads.</p> | | 15-ZE381 | \$ 53.48 |
| | | 15-ZE381-5 CASE Case of 5 | \$ 194.50 (\$ 38.90 ea) |
|  <p>National Spencer Siphon Pump</p> <p>This siphon pump fits 15-55 gallon drums. Siphons 7 gallons per minute. Polyethylene (body) and polypropylene (suction tube) construction.</p> | | 15-ZE369AR-24 Case of 24 | \$ 414.22 (\$ 17.26 ea.) |
| | | | |
|  <p>National Spencer Lever Action Pump</p> <p>Lightweight corrosion resistant Chemical Pump. Fits 15-55 gallon drum, 12 oz. per stroke. Polypropylene construction. For use with DEF, water based fluids, acid, and alkali solutions.</p> | | 15-ZE375 | \$ 57.27 |
| | | | |

DRUM HANDLING EQUIPMENT

| | | MODEL # | PREFERRED |
|---|---|-----------|-----------|
|  | National Spencer Dolly for 5 Gallon or 35-50 Lb. Pail | 15-105 | \$ 45.94 |
|  | National Spencer Dolly for 16 Gallon or 120 Lb. Drum | 15-120-S | \$ 55.58 |
|  | National Spencer Dolly with 5 wheels for 30 Gallon Drum | 15-130-S | \$ 94.80 |
|  | National Spencer Dolly for 55 Gallon Drum | 15-138-S | \$ 82.52 |
|  | National Spencer Dolly for 55 Gallon Drum | 15-140-S | \$ 98.99 |
|  | National Spencer Dolly for 55 Gallon Drum with Wider Caster Base | 15-140SOR | \$ 98.84 |
|  | National Spencer Model 135 Drum Cradle with axle and wheels | 15-135 | \$ 95.49 |
| | National Spencer Model 135 Drum Cradle without axle and wheels | 15-137 | \$ 105.84 |
| Follower Plates | | | |
|  | 5 Gallon Barrels Follower plate for 5 gal pails. With rubber edge for tapered pails. With 1" center diameter. 15-107016 | 15-107016 | \$ 23.81 |
| | 120 Lb. Drums Follower plate with rubber edge for 120 Lb. tapered or straight-sided drums. 13/16" center diameter. 15-1524 | 15-1524 | \$ 42.67 |
| | 55 Gallon Barrels Follower plate for 55 gallon drums. 15-18573 | 15-18573 | \$ 99.62 |

FOLLOWER PLATES

HOSE REELS

Reelcraft Heavy Duty 7000 Series



The 7000 Series incorporates contemporary engineering and manufacturing techniques to give trouble free performance. Reels are all steel construction and compact for application with critical space requirements. All Reelcraft reels have a full flow shaft and swivel to assure maximum product delivery. The standard low pressure hose is for air or water service only. The basic reel without hose can be used for air, water or oil.

APPLICATIONS

Industrial, Automotive shops and fleet maintenance facilities, Agriculture, Pneumatic tools, Service trucks.

MODEL #

PREFERRED

3/8" x 50'
LOW PRESSURE
10-7650-OLP

\$ 498.82

1/2" x 50'
LOW PRESSURE
10-7850-OLP

\$ 516.46

1/2" x 50'
MEDIUM PRESSURE
10-7850-OMP

\$ 674.24

1/4" x 50'
HIGH PRESSURE
10-7450-OHP

\$ 769.30

3/8" x 50'
HIGH PRESSURE
10-7650-OHP

\$ 782.04

Reelcraft Light Industrial RT Series



Reelcraft presents "ReelTek", a hybrid reel, designed for strength and lighter weight. ReelTek is ideal for applications that are less demanding, yet require a product that can withstand industrial use. The hybrid design incorporates industrial grade steel with engineered composite components.

APPLICATIONS & MARKETS

- Maintenance Shop * Light Industrial
- Assembly Line * Chip Blow-off * Woodworking
- * Garden Shops * Home Workshops * Garages
- * Consumer * Machine Shops

3/8" x 35'
LOW PRESSURE
10-RT635-OLP

\$ 239.12

3/8" x 50'
LOW PRESSURE
10-RT650-OLP

\$ 308.70

1/2" x 35'
LOW PRESSURE
10-RT835-OLP

\$ 363.58

Reelcraft Fuel Reels FD80000 Series



APPLICATIONS

Marinas, Service trucks, Agriculture, Auto service centers, Industrial, Aircraft maintenance, Fuel dispensing

3/4" x 50'
10-F83050-OLP

\$ 1,108.38

3/4" x 75'
10-FD83075-OLP

\$ 1,397.48

3/4" REEL NO HOSE
10-FD83000-OLP

\$ 913.36

1" x 50'
10-FD84050-OLP

\$ 1,164.24

1" REEL NO HOSE
10-FD84000-OLP

\$ 860.44



Static Grounding Reels

50' Cable with Clip

10-G3050

\$ 379.26